


## Script generated by TTT

Title: Nipkow: Info2 (14.01.2014)

Date: Tue Jan 14 15:30:44 CET 2014

Duration: 84:39 min

Pages: 6

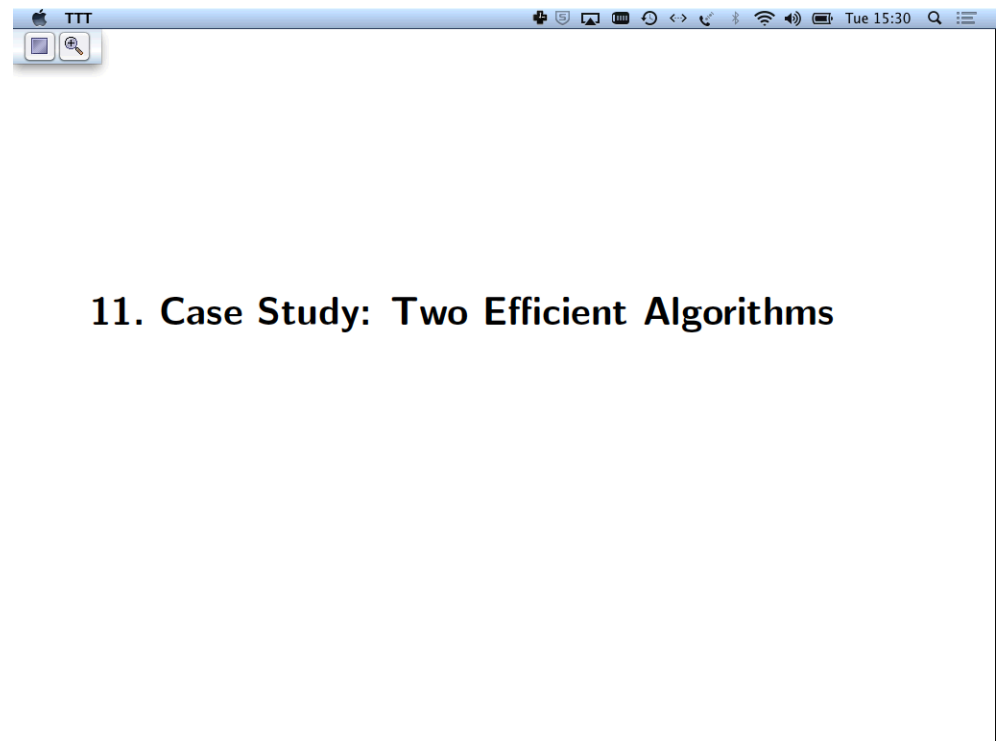

## 11. Case Study: Two Efficient Algorithms



This lecture covers two classic efficient algorithms in functional style on the blackboard:

### Huffman Coding

See the Haskell book by Thompson for a detailed exposition.



This lecture covers two classic efficient algorithms in functional style on the blackboard:

### Huffman Coding

See the Haskell book by Thompson for a detailed exposition.

### Skew Heaps

See the original paper for an imperative presentation and the derivation of the amortized complexity:

Daniel Sleator and Robert Tarjan. Self-adjusting heaps. *SIAM Journal on Computing* 15(1):52–69, 1986.



This lecture covers two classic efficient algorithms in functional style on the blackboard:

#### Huffman Coding


See the Haskell book by Thompson for a detailed exposition.

#### Skew Heaps

See the original paper for an imperative presentation and the derivation of the amortized complexity:

Daniel Sleator and Robert Tarjan. Self-adjusting heaps.  
*SIAM Journal on Computing* 15(1):52–69, 1986.

The source files are on the web page.



This lecture covers two classic efficient algorithms in functional style on the blackboard:

#### Huffman Coding

See the Haskell book by Thompson for a detailed exposition.

#### Skew Heaps

See the original paper for an imperative presentation and the derivation of the amortized complexity:

Daniel Sleator and Robert Tarjan. Self-adjusting heaps.  
*SIAM Journal on Computing* 15(1):52–69, 1986.

The source files are on the web page.